



PLACID
MEASUREMENT
MICROPHONE

**PMP
20**

ACCURATE & STABLE

PLACID MEASUREMENT MICROPHONES

Discover a wide selection of our measurement microphones according to your sound measurement needs

Placid Instruments BV

Newtonlaan 115

Office No. 2.21

3584 BH UTRECHT

THE NETHERLANDS

info@placidinstruments.com

www.placidinstruments.com

PLC/PMP20/23/UAV2.2

ASK US!
HERE





PLACID INSTRUMENTS BV

Newtonlaan 115 Office No. 2.21 3584 BH UTRECHT, THE NETHERLANDS

Phone +31 302106021

email info@placidinstruments.com

website www.placidinstruments.com

PLACID PMP20

1/2" PRE-POLARIZED FREE-FIELD MICROPHONE, CLASS 1



Specification

Frequency Range

20 Hz to 40 kHz

Dynamic Range

25 to 155 dB(A)

Nominal Sensitivity

12 mV/Pa

PLACID PMP20 is 1/2" prepolarized free field measurement microphone. It is intended to be used in IEC Class 1 Sound Level Meters, and other noise measurements where Class 1 accuracy is required.

All the microphones are going through solid environmental testing, which includes high temperature ageing and high humidity ageing.



PLACID INSTRUMENTS BV

Newtonlaan 115 Office No. 2.21 3584 BH UTRECHT, THE NETHERLANDS

Phone +31 302106021

email info@placidinstruments.com

website www.placidinstruments.com

Specification

Basics

The PLACID PMP20 is a high-precision condenser microphone manufactured in compliance with the IEC 61094-4 requirements and classified as a class 1 microphone.

The PMP20 microphone is optimized for free-field measurements. As all PLACID microphones, the PMP20 comes with an individually calibration certificate.

Connectivity

The PLACID PMP20 microphone requires a standardized 1/2" BNC preamplifier that does not need to provide polarization.

Uses

The PMP20 is a robust and stable microphone and is being used as an all-round free field microphone suitable for laboratory as well as field jobs.

Daily usage

PLACID recommends calibration before and after each measurement with a calibrator.

Individual calibration

All PLACID microphones are being calibrated in a controlled laboratory environment using traceable calibration equipment complying with ISO17025 standards.

We recommend that all PLACID microphones are re-calibrated every year to guarantee an optimized usage.

PLACID Traceable Calibration is performed by our qualified staff and under controlled conditions according to the procedures and standards such as ISO17025.

Quality

All PLACID microphones are made of high-quality materials that will ensure long stability and durability.

The microphone diaphragm, body, and protection grid are made of high-grade stainless steel, which makes the microphone resistant to physical damage. PLACID offers 2 years warranty against defective materials and workmanship.



PLACID INSTRUMENTS BV

Newtonlaan 115 Office No. 2.21 3584 BH UTRECHT, THE NETHERLANDS

Phone +31 302106021

email info@placidinstruments.com

website www.placidinstruments.com

DATASHEET PLACID PMP20 MICROPHONE



Materials

Grid	Copper
Housing	Stainless Steel
Diaphragm	Nickel
Back Plate	Stainless Steel
Insulator	Crystal Quartz
Electret	Teflon

Acoustical Properties

Frequency Response	Free-field
Open Circuit Sensitivity	12mV/Pa \pm 2dB
Equivalent Noise Level	< 25 dB(A)
T.H.D	< 3% at 155dB SPL
Polarization Voltage	0 V
Capacitance	16.0 pF
Equivalent Air Volume	230 mm ³ at 250 Hz.
Diaphragm Resonance Frequency	16 kHz.
Pressure Vent	Rear
Operating Temperature Range	-30°C, ~ 90°C
Temperature Coefficient	< -0.012 dB/°C (at 250Hz, -10 ~ 50 °C;)
Humidity Coefficient	< 0.1 dB/% (at 250Hz, 0 ~ 98 %RH)
Pressure Coefficient	< -0.01 dB/kPa (at 250 Hz, 65 kPa – 108 kPa)



PLACID INSTRUMENTS BV

Newtonlaan 115 Office No. 2.21 3584 BH UTRECHT, THE NETHERLANDS

Phone +31 302106021


email info@placidinstruments.com

website www.placidinstruments.com

DATASHEET PLACID PMP20 MICROPHONE



The typical frequency response for PMP20

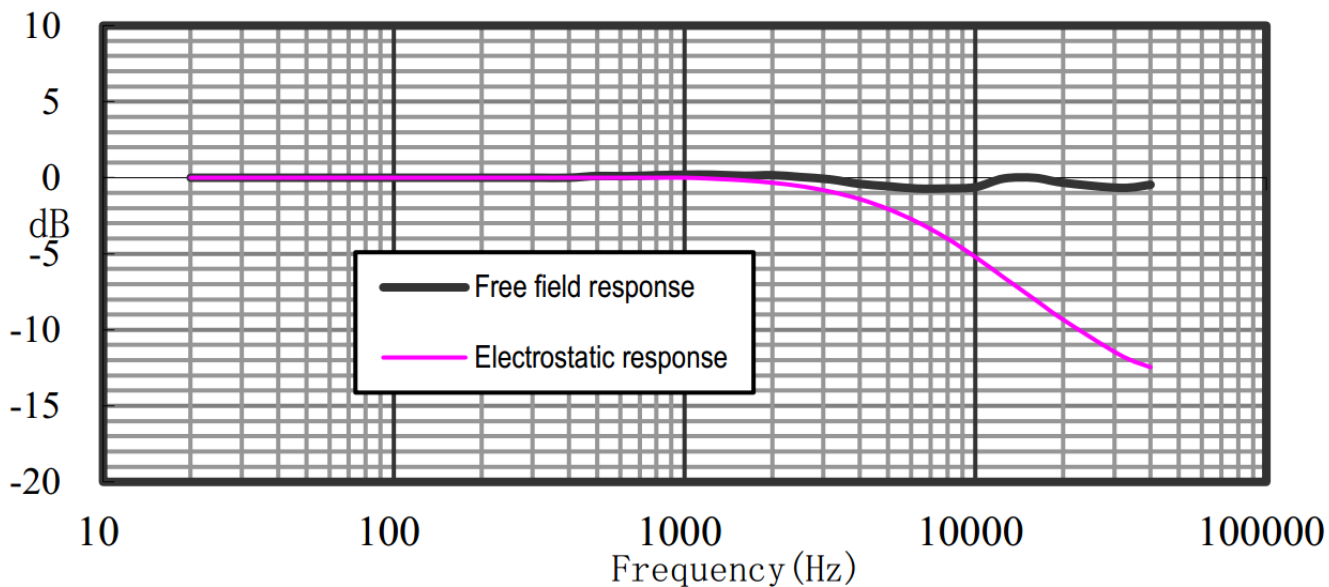



PLACID INSTRUMENTS BV

Newtonlaan 115 Office No. 2.21 3584 BH UTRECHT, THE NETHERLANDS

Phone +31 302106021

email info@placidinstruments.com

website www.placidinstruments.com

DATASHEET PLACID PMP20 MICROPHONE



Pressure to free field correction

when using an electrostatic actuator of PMP20 with Protection Grid

(unit: dB)

Frequency kHz	0°	30°	60°	90°	120°	150°	180°
1.00	0.2	0.1	0.0	-0.1	-0.2	-0.2	-0.1
1.25	0.3	0.3	0.1	-0.1	-0.2	-0.2	0.0
1.60	0.4	0.4	0.1	0.0	-0.2	-0.2	0.1
2.00	0.5	0.5	0.2	0.0	-0.2	-0.2	0.1
2.50	0.6	0.5	0.2	0.1	-0.3	-0.2	0.1
3.15	0.8	0.5	0.1	0.0	-0.4	-0.3	0.2
4.00	1.0	0.8	0.2	0.0	-0.5	-0.6	-0.4
5.00	1.5	1.2	0.3	0.0	-0.9	-0.9	-0.5
6.30	2.2	1.9	0.9	0.1	-0.8	-0.8	-0.3
8.00	3.3	2.7	1.4	0.1	-0.9	-0.9	-0.1
10.00	4.6	3.9	1.9	-0.2	-1.7	-1.6	-0.4
12.50	6.5	5.7	3.4	0.7	-1.0	-0.8	0.7
16.00	8.0	6.7	3.4	-0.5	-3.0	-2.5	-1.0
20.00	9.0	7.2	2.5	-2.7	-5.8	-5.5	-3.5



PLACID INSTRUMENTS BV

Newtonlaan 115 Office No. 2.21 3584 BH UTRECHT, THE NETHERLANDS

Phone +31 302106021

email info@placidinstruments.com


website www.placidinstruments.com

DATASHEET PLACID PMP20 MICROPHONE



Dimensions

Dimensions	d1	d2	l1	l2	d4	d5	d3	Total L
IEC 61094-4 Requirements for WS2F	13.2	12.7	3.6-4.6	>2.2	3-5	>7.8	11.70-60UNS-2B	N/A
PMP20	13.20	12.68	4.30	4.30	3.01	7.90	11.70-60UNS-2B	12.50

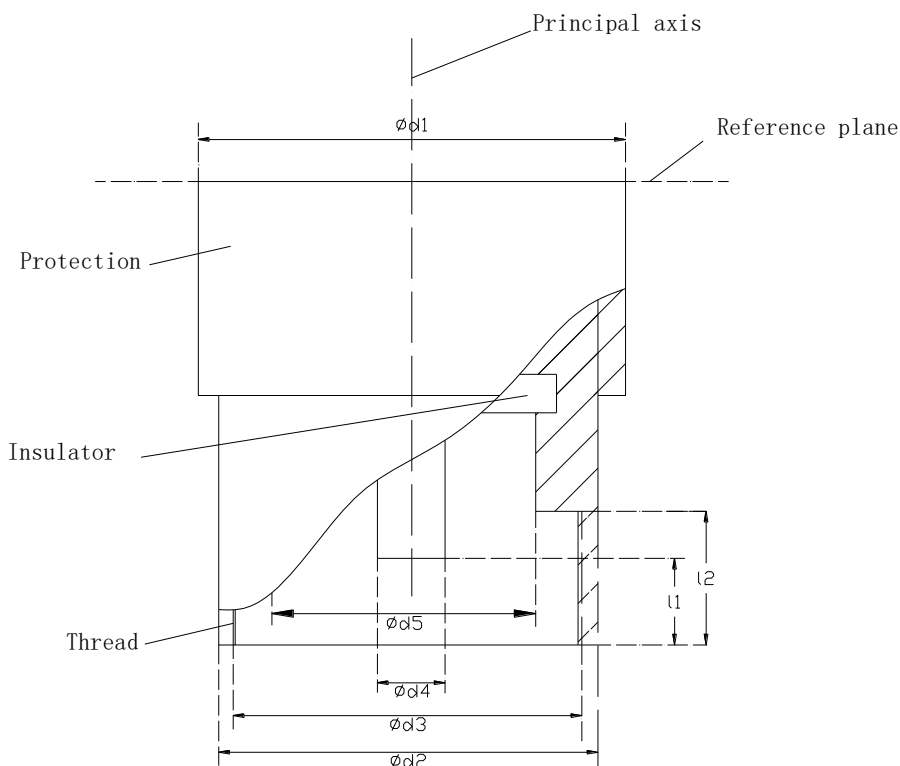



Placid Instruments BV

Newtonlaan 115, Office No. 2.21

3584 BH UTRECHT

THE NETHERLANDS

Phone landline : +31 302106021

Email : info@placidinstruments.com

www.placidinstruments.com

ASK US!
HERE

