



ACCURATE & EASY TO USE

Discover a wide selections of our
sound measurement equipments according to your
sound measurement needs

P-AMPL3

TRIPOD
MEASURING PLATE



www.placidinstruments.com



PLACID INSTRUMENTS BV

Newtonlaan 115 Office No. 2.21 3584 BH UTRECHT, THE NETHERLANDS

Phone +31 302106021

email info@placidinstruments.com

website www.placidinstruments.com

PLACID

Tripod Measuring Plate

P-AMPL3



APPLICATION

The PLACID P-AMPL3 accessory item is intended for the measurement of floor vibration in buildings with piezoelectric accelerometers. It was designed according to DIN 45669-2 (Measurement of vibration immission Measuring method).



PLACID INSTRUMENTS BV

Newtonlaan 115 Office No. 2.21 3584 BH UTRECHT, THE NETHERLANDS

Phone +31 302106021


email info@placidinstruments.com

website www.placidinstruments.com

LIST OF COMPONENTS



TOTAL WEIGHT : (WITHOUT SENSORS) +/- 3 KG

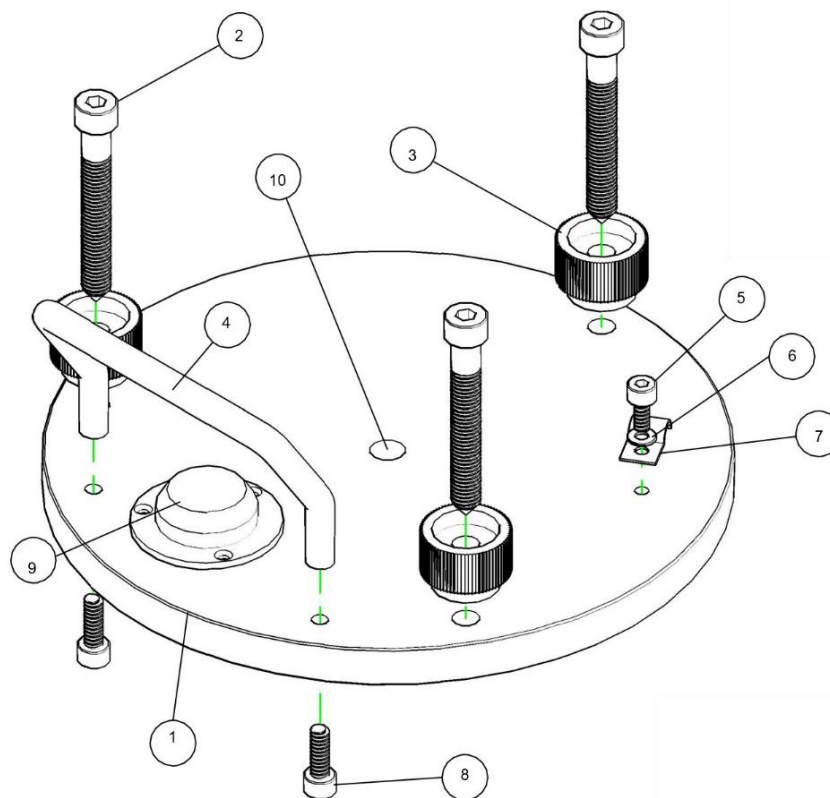

- Stable and rigid handgrip (4)
- M10 hole in the middle for the sensor (10)
- Adjustable feet (8) for leveling with bulls eye spirit level (9)
- Cable guidance (7)
- Spike feet (2) for use on soft floor coverings

No	Description
1	Stainless Steel Ø 190 mm. Thickness 12 mm.
2	Socket Bolt Stainless Adjustable Foot M8 X 60 (3X)
3	Knurtled nut M8 (3X)
4	Handle
5	Socket Bolt Stainless M4 x 10
6	Washer
7	Cable Clip ø 5 mm.
8	Socket Bolt Stainless M5 x 12 (2x)
9	Bulls eye spirit level
10	Hole 10 mm.